

# M1500E6

Industrial Range Powered By MTU

**AGG** Power Solutions



Standards : 2006/42/EC Machinery safety, 2006/95/EC Low voltage, EN 60204-1 : 2006+A1 : 2009, EN ISO 12100 : 2010, EN ISO 8528-13:2016, ENISO 13849-1: 2015, EN 60204-1: 2018

PRP: Prime power is available for an unlimited number of annual operating hours in variable load applications , in accordance with ISO 8528-1.

ESP : The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1. overload is not allowed.

Conditions : According to the standard, the nominal power assigned by the genset is given for 25° C air inlet temperature, of a barometric pressure of 100 kPa (100 m A.S.L), and 30 % relative humidity.


## GENERATOR SPECIFICATION

ITEMS	PRP	EPS
Power	1375kVA	1500kVA
Power	1100kW	1200kW
Frequency / Phase / Power factor	60Hz / 3P / PF0.8	
Standard voltage	440/257V	
Available voltage	440/257V · 480/277V	



## GENERAL INSTALLATION

ITEMS	OPEN	SILENT
Dimension(L*W*H)(mm)	4695*2296*2340	6058*2438*2896
Weight(kg)	8935	14000
Fuel tank(L)	N/A	1000
Sound pressure level		
@75% load&1m dB(A)		TBA
@75% load&7m dB(A)		TBA



NOTE: Weights and dimensions based on standard products. According to 2000/14/CE , sound data is provided at 7m for 75% prime power. For actual installation, please contact the manufacturer.

PERFORMANCE DATA		
Engine brand	MTU	
Engine model	18V2000G85	
Fuel	Diesel	
Aspiration	Turbocharged and Charge Air Cooled	
Cooling	Water-cooled	
Governor	ECU	
Cyl arrangement	18V	
Application	Prime & Standby	
Fuel consumption	100% ESP(L/H)	293
	100% PRP(L/H)	269
	75% PRP(L/H)	209
	50% PRP(L/H)	141

## ENGINE SPECIFICATION

### BASIC DATA

Engine brand	MTU
Engine model	18V2000G85
Displacement	35.82L
No. of cyl / arrangement	18V
Bore x stroke	130x150mm
Compression ratio	16.0 : 1
Engine speed	1800rpm
Engine type	4-stroke diesel

### EXHAUST SYSTEM

Exhaust stack gas temperature (max. )	530 °C
Exhaust gas flow rate (max. )	4.4 m <sup>3</sup> /s
Exhaust system backpressure (maximum allowable)	85 mbar

### FUEL SYSTEM

Maximum restriction at lift pump	1.0 Bar
Max. fuel flow	8 L/min

### COOLING SYSTEM

Radiator air flow	TBA m <sup>3</sup> /min
Total oil capacity	130 L
Total coolant capacity	280 L

### ELECTRICAL SYSTEM

Starter motor rated voltage	DC24V
Start battery	2x120Ah(850CCA)
Battery charging alternator	DC24V/64A

### INLET AIR

Air filter	Dry type
Max. combustion air Intake restriction	50 mbar
Combustion air inlet flow rate	1.8 m <sup>3</sup> /s
Max. allowable combustion air inlet temp	50°C

## ALTERNATOR SPECIFICATION

### BASIC DATA









Insulation & temperature rise	Class H/H
Excitation type	Self-excited
Winding leads	6
Winding connections (standard)	Star
Winding pitch	Two thirds
Number of phase	Three phase


### BASIC DATA

Type	Brushless
No. of bearings	Single bearing
Coupling system	Flexible disc
Maximum over speed	2250 RPM
Coating type	Vacuum impregnation
IP rating	IP23

# CONTROL SYSTEM

Key features

<p>Single generator set control- can be used in prime or standby scenarios</p> 	<p>Manual and remote start, MRS application</p> 	<p>Auto mains failure, AMF application</p> 
<p>Genset power/frequency/factor /voltage/current detection</p> 	<p>Engine / alternator / genera- tor protections, emergency stop</p> 	<p>Event log / running hours history / maintenance warning, LCD screen</p> 
<p>User access management, software and tools are easy to use</p> 	<p>Input or output configuration, USB communication port</p> 	

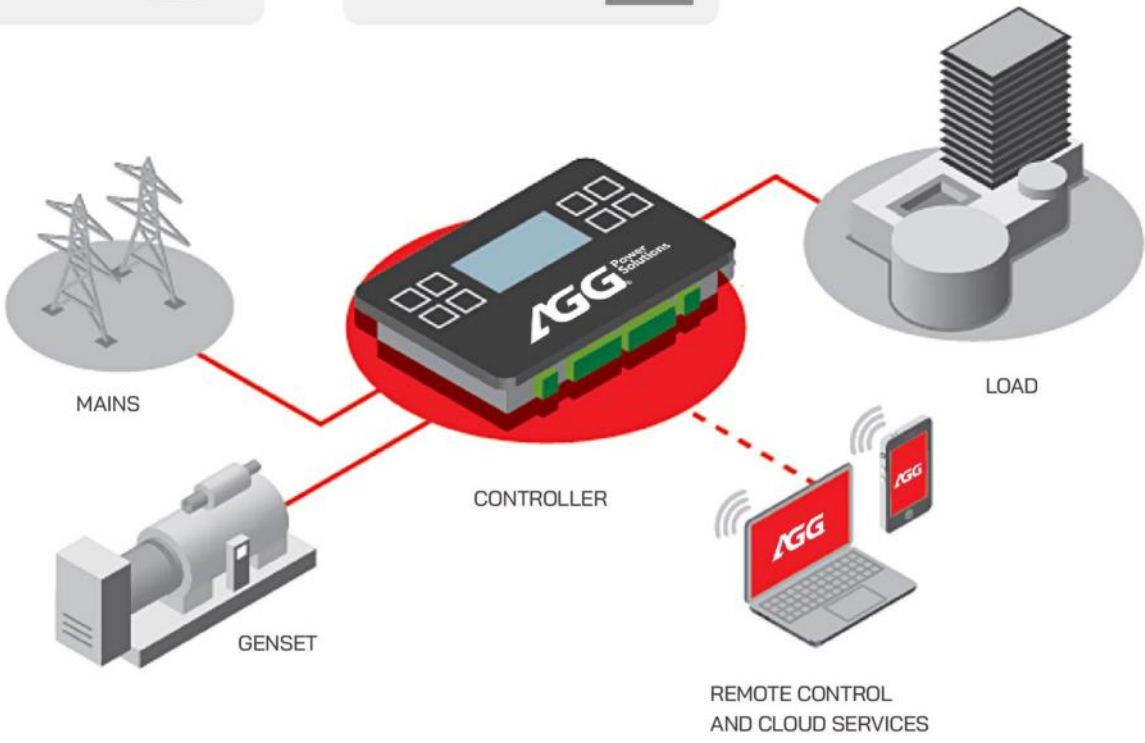

## GENSET VERSION

### STANDARD FEATURES

- ♦ Diesel engine, 50 degrees radiator, brushless alternator
- ♦ Intelligent controller
- ♦ Output circuit breaker (up to 1250A)
- ♦ Maintenance-free start battery, battery charge, battery switch
- ♦ Steel industrial silencer, exhaust bellows and elbows
- ♦ Steel chasis and anti-vibration shock absorbers
- ♦ Lifting and moving structure, expansion of oil and coolant discharge
- ♦ Moving parts protection, hot parts protection
- ♦ Special toolbox, delivery attached documentation



### OPTIONAL FEATURES

#### ENGINE

- ♦ Water jacket preheater
- ♦ Oil Preheater, oil level maintainer, oil manual pump
- ♦ Heavy air filtration
- ♦ Residential silencer
- ♦ Remote radiator, heat exchanger

#### ALTERNATOR

- ♦ PMG/AREP excitation system
- ♦ Anti-condensation heater
- ♦ Winding/bearing RTD
- ♦ Double bearing structure
- ♦ IP44 protection class

#### CONTROL SYSTEM

- ♦ Synchronizing panel, remote control panel
- ♦ RS232/485, 4G & GPS wireless, ethernet communication card
- ♦ Additional digital/analog input/output
- ♦ Monitoring software, mobile APP
- ♦ Ni-Cad batteries

#### GENERATING SET

- ♦ External fuel tank, automatic fuel feeding
- ♦ ATS/output /combining/distribution cabinet
- ♦ Load test cabinet
- ♦ Mobile trailer
- ♦ Customized design